

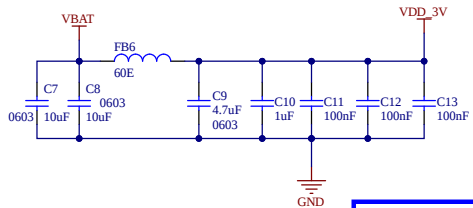


DECOUPLING CAPACITOR

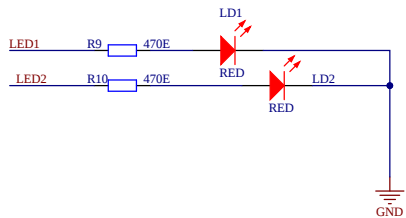

LAYOUT NOTE:
1uF should be near to 32pin

32MHz CRYSTAL




VBAT Battery Volatge

Note:


All SMD resistor are in 0402, 1% carbon film type unless otherwise specified
All SMD capacitor are in 0402 ceramic package 50V unless otherwise specified

MICRO-CONTROLLER

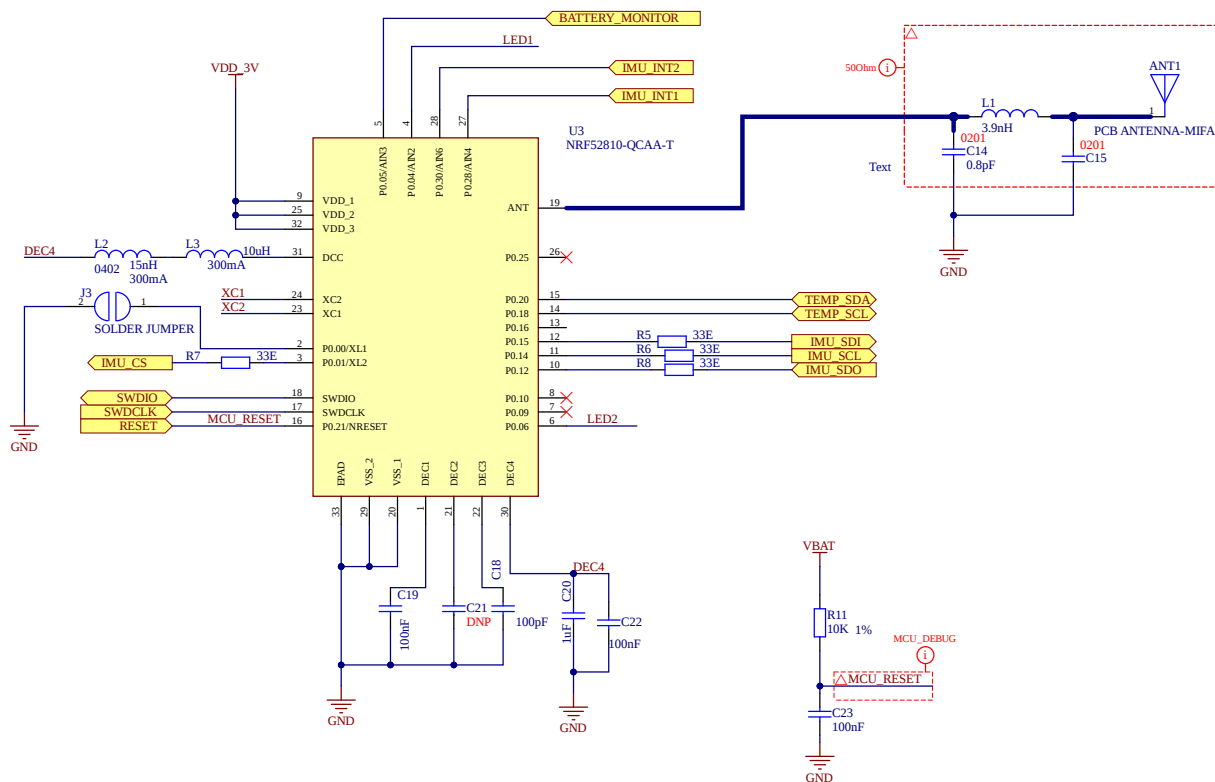


LAYOUT NOTE:
PCB Inverted F Type Antenna

BATTERY CONNECTOR




DESIGN NOTE:
CR2450 is Coin cell
Battery(3V/625mAh)


IMU SENSOR

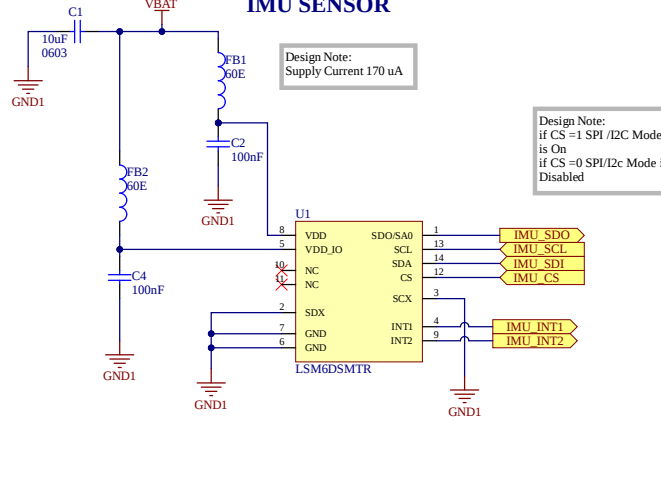

BATTERY MONITOR

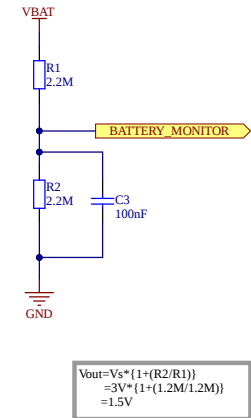

DEBUG CONNECTOR

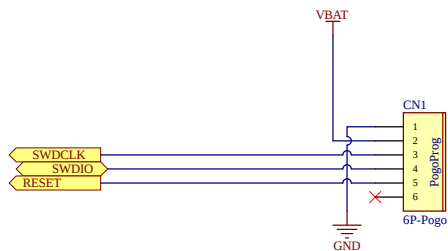

TEMPERATURE SENSOR

