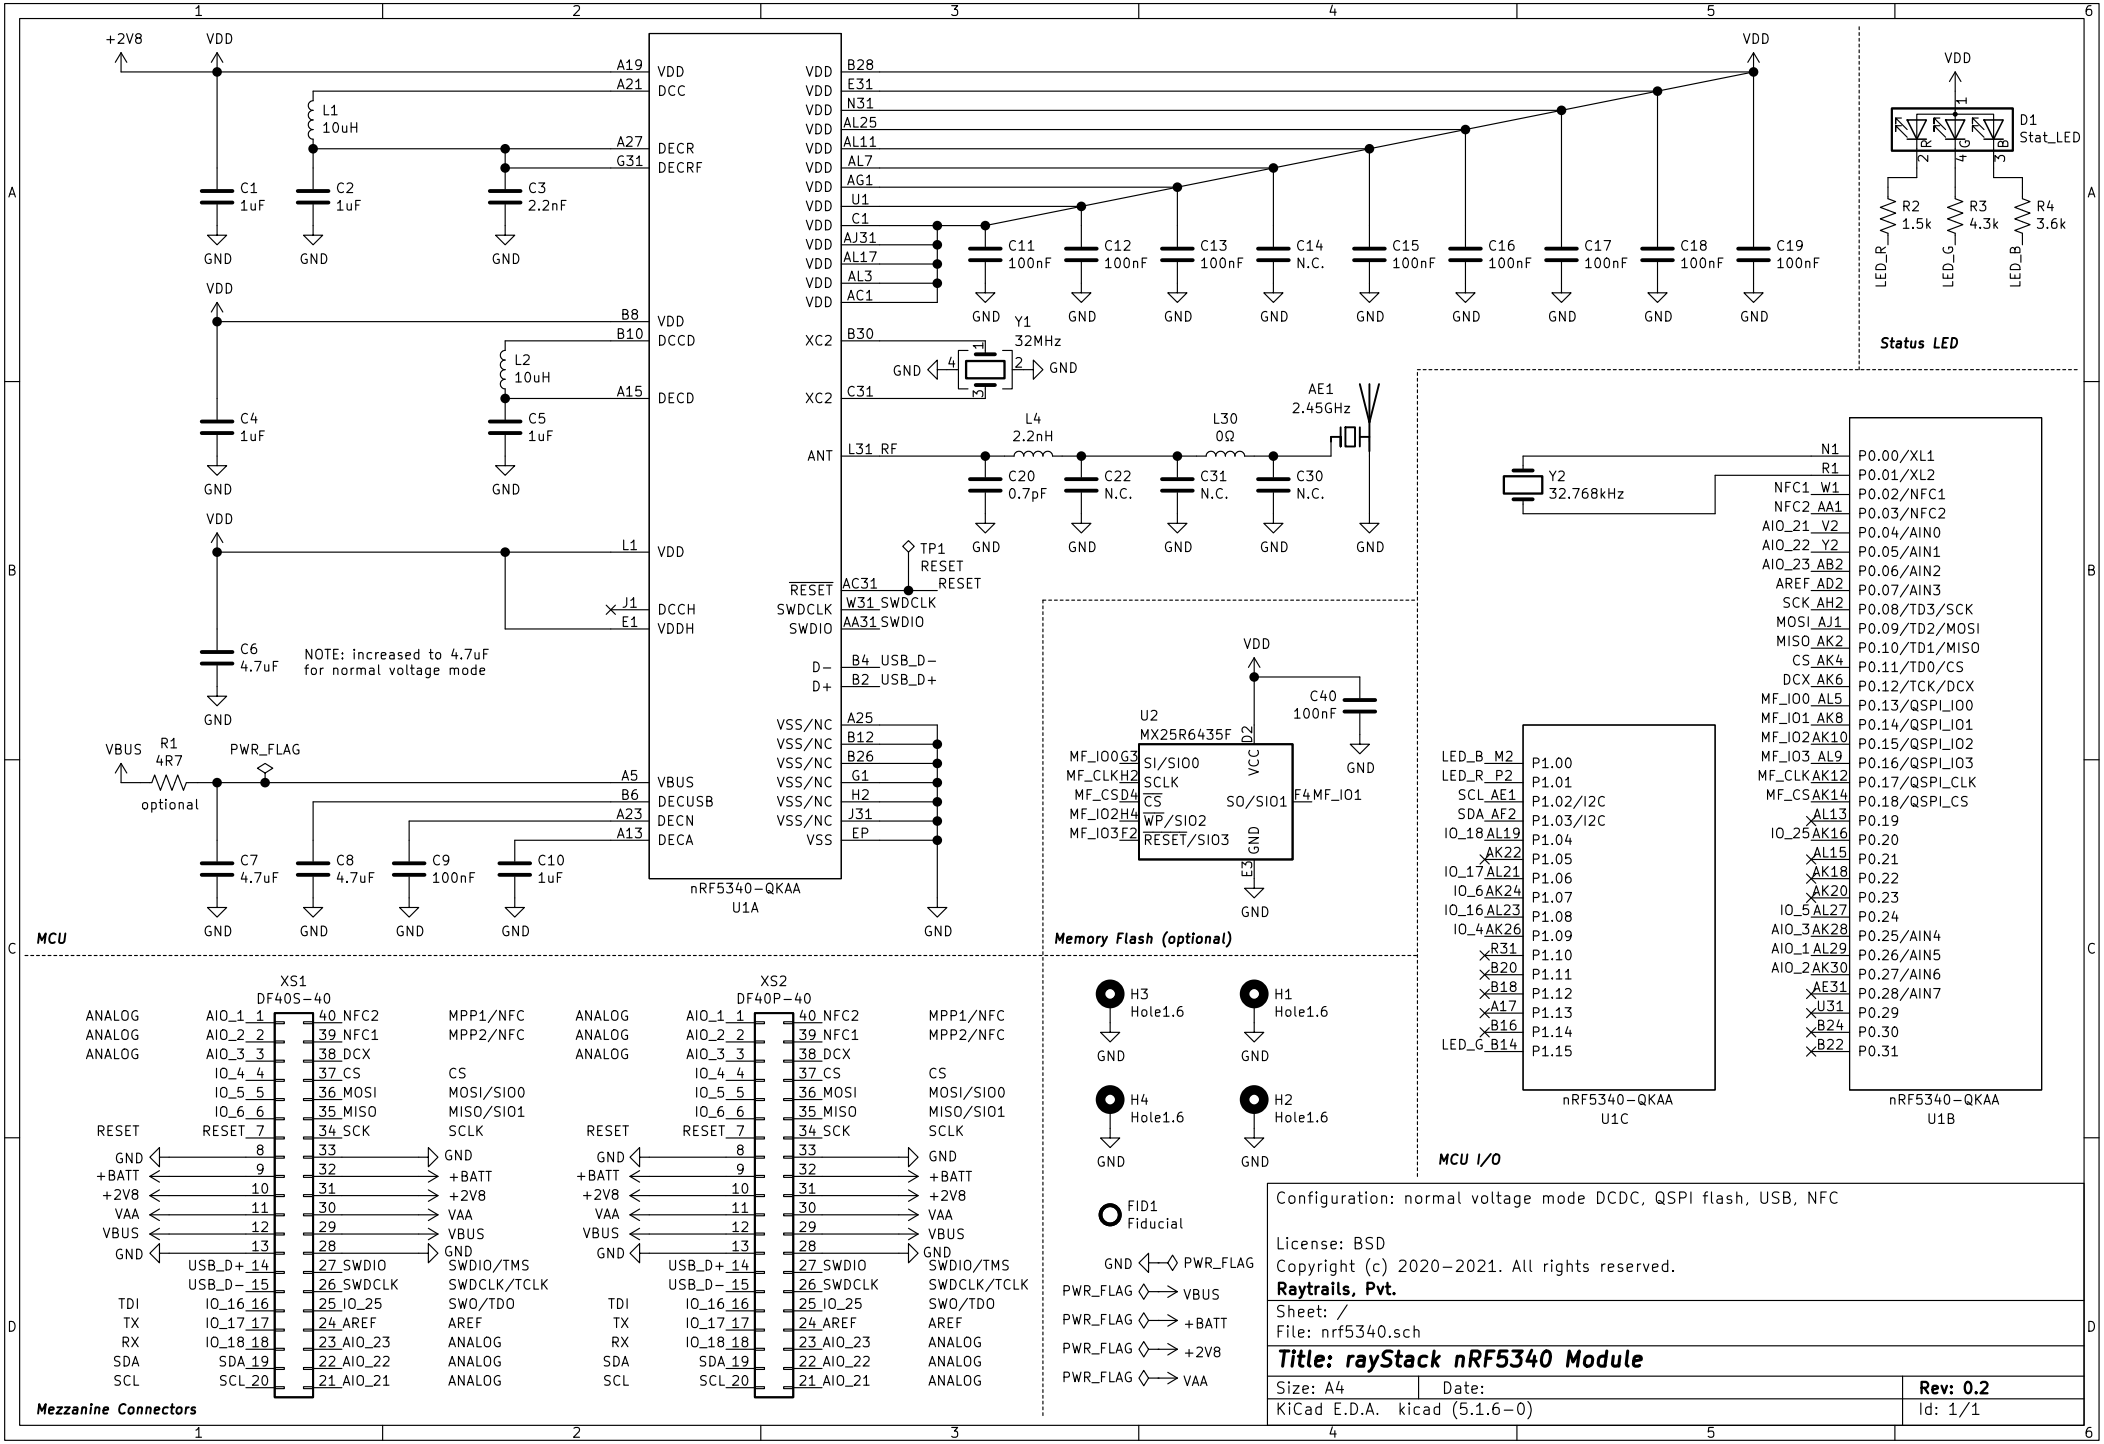
MCU
Memory Flash (optional)
Status LED
MCU I/O
Mezzanine Connectors
nRF5340-QKAA
U1A
nRF5340-QKAA
U1B
nRF5340-QKAA
U1C
MX25R6435F
U2
NOTE: increased to 4.7uF for normal voltage mode
optional
32MHz
32.768kHz
2.45GHz
Stat_LED
DF40S-40
DF40P-40
Configuration: normal voltage mode DCDC, QSPI flash, USB, NFC
License: BSD
Copyright (c) 2020-2021. All rights reserved.
Raytrails, Pvt.
Sheet: /
File: nrf5340.sch
Title: rayStack nRF5340 Module
Size: A4
Date:
Rev: 0.2
KiCad E.D.A. kicad (5.1.6-0)
Id: 1/1