



I2C Address : 0x6B (7-bit)


**Charger IC with Power Management**



Notes: Fuel guage (U31) can be done  
DNP if we successfully read  
battery percentage using charger IC  
itself as it has inbuilt features.



Please refer bringup document for this section

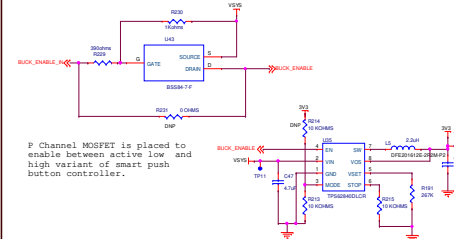

## DC to DC converter

