


FCC Part 15.247, (a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.



BLE modulation, 1 Mbit data rate



BLE modulation, 2 Mbit data rate

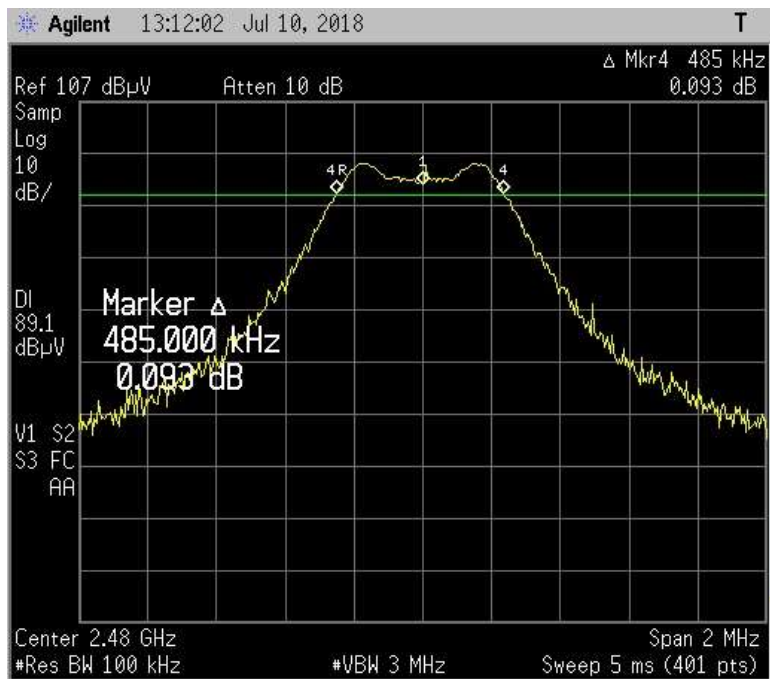

Nordic modulation, 1 Mbit data rate



Nordic modulation, 2 Mbit data rate