


SDK Example HRS, default with only change to enable DC/DC using


```
sd_power_dcdc_mode_set(NRF_POWER_DCDC_ENABLE);
```

Running on nRF52840 DK v1.0.0 with PPK v1.1.0


SDK v15.3.0, avg. 430 uA

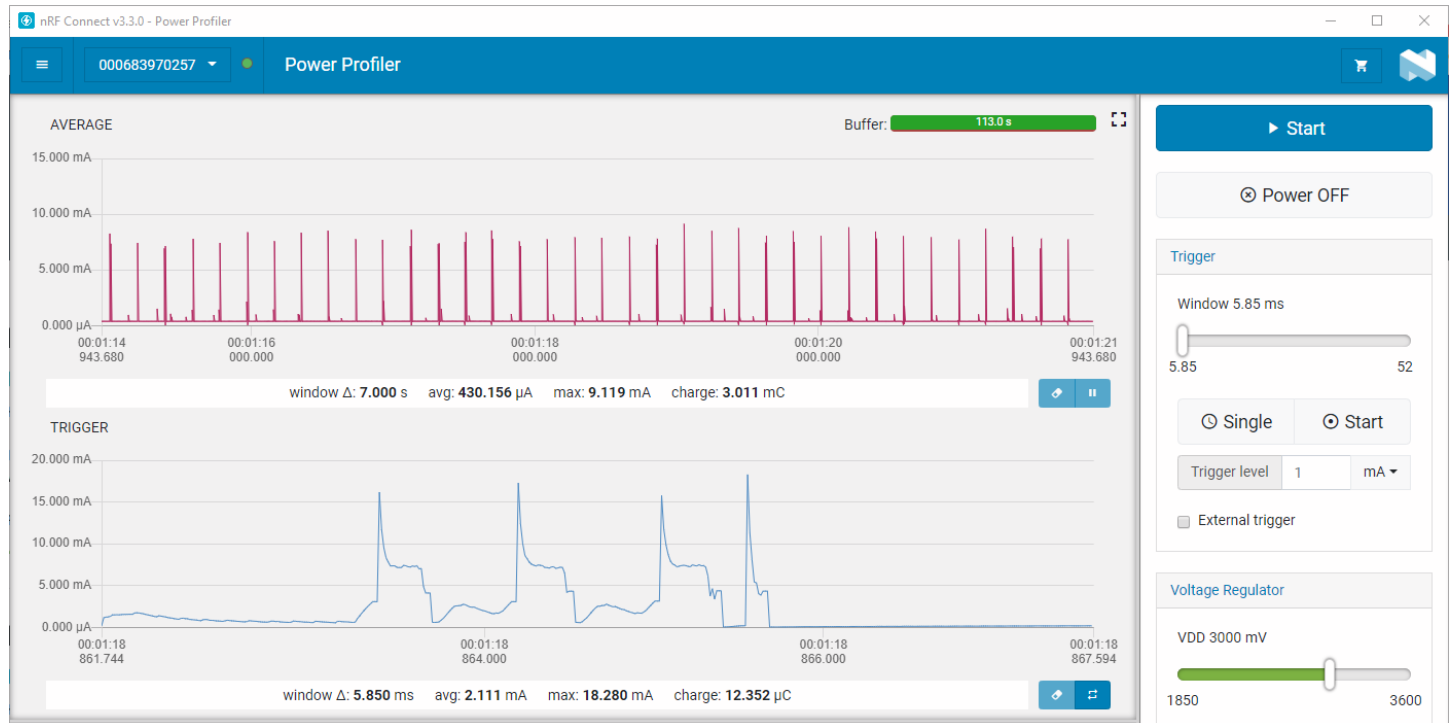

SDK v15.3.0, current between advertisements, avg. 377 uA

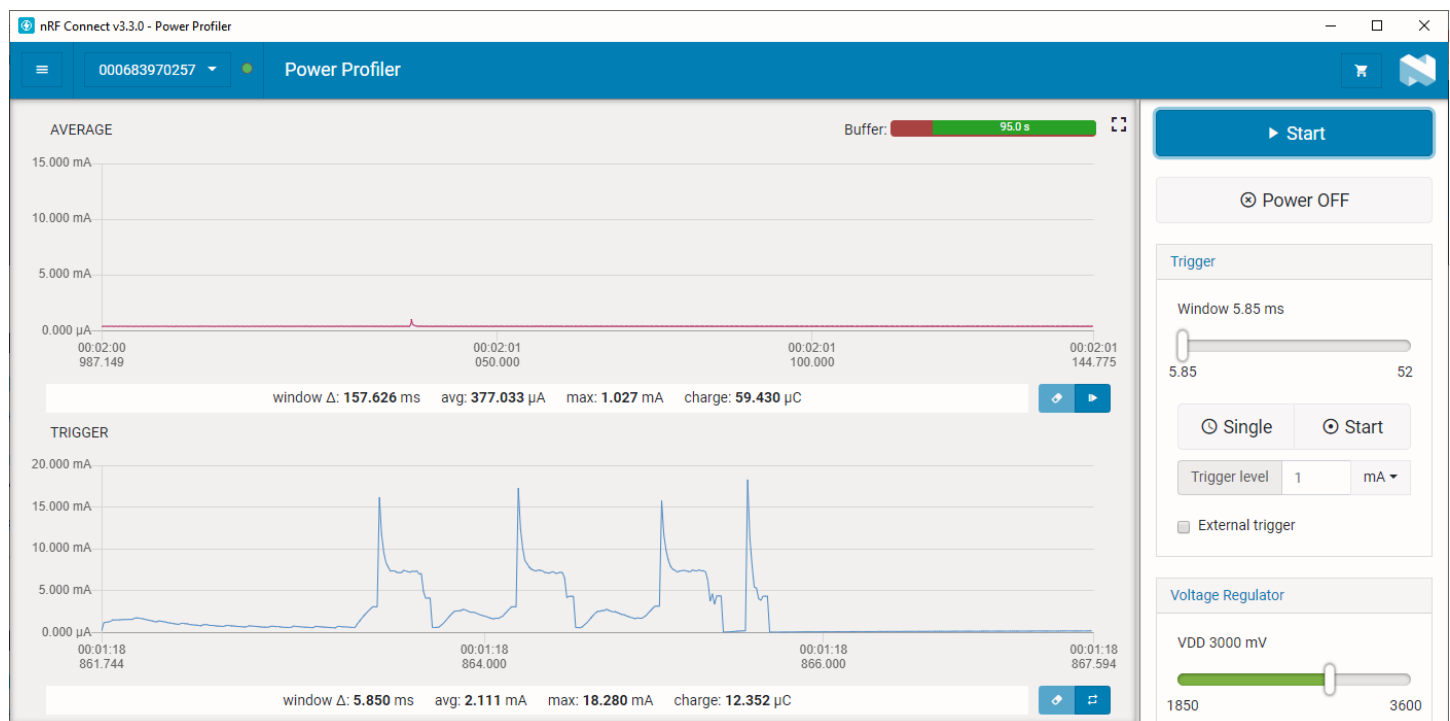

SDK v16.0.0, avg. 80 uA

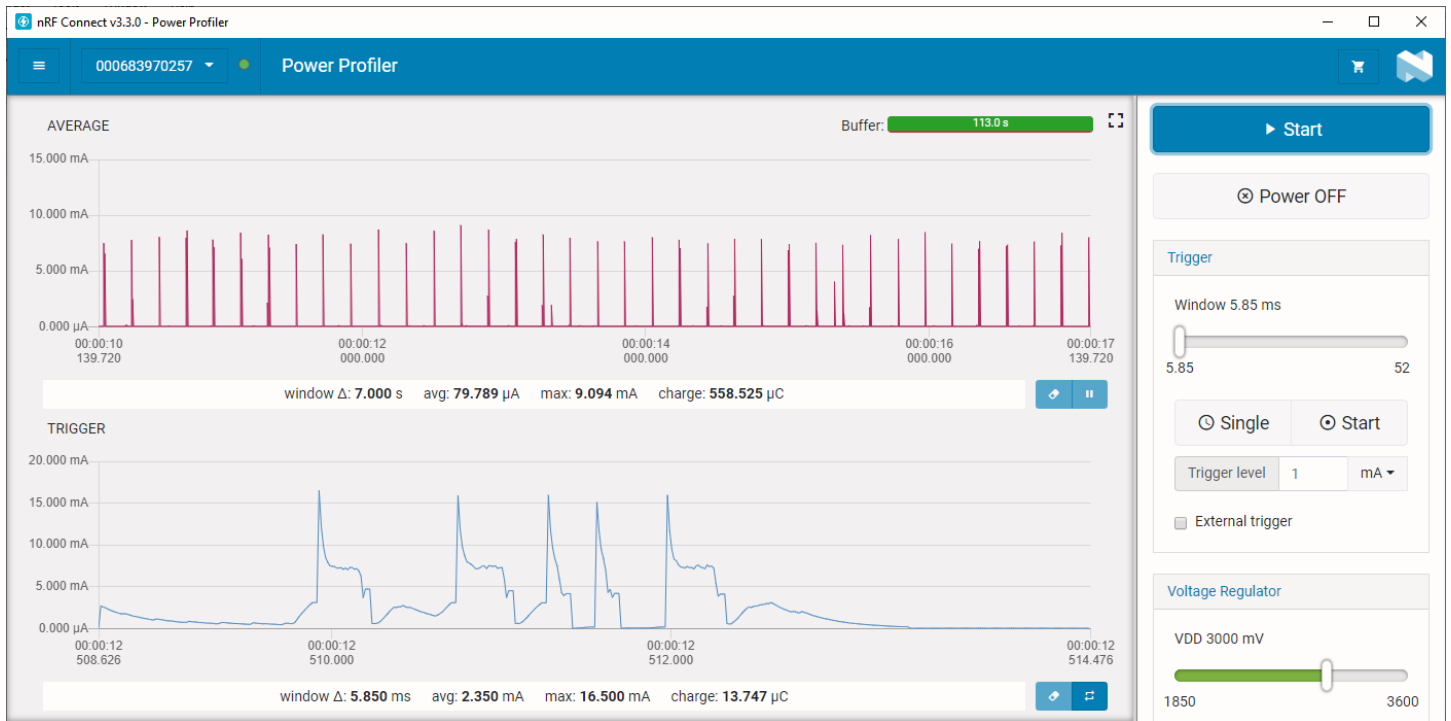

SDK v16.0.0, current between advertisements, avg. 17 uA

