

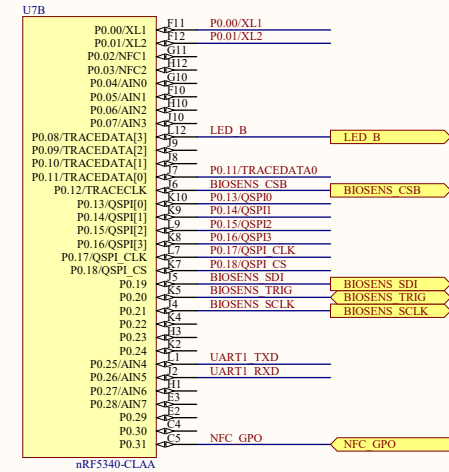



NRF5340

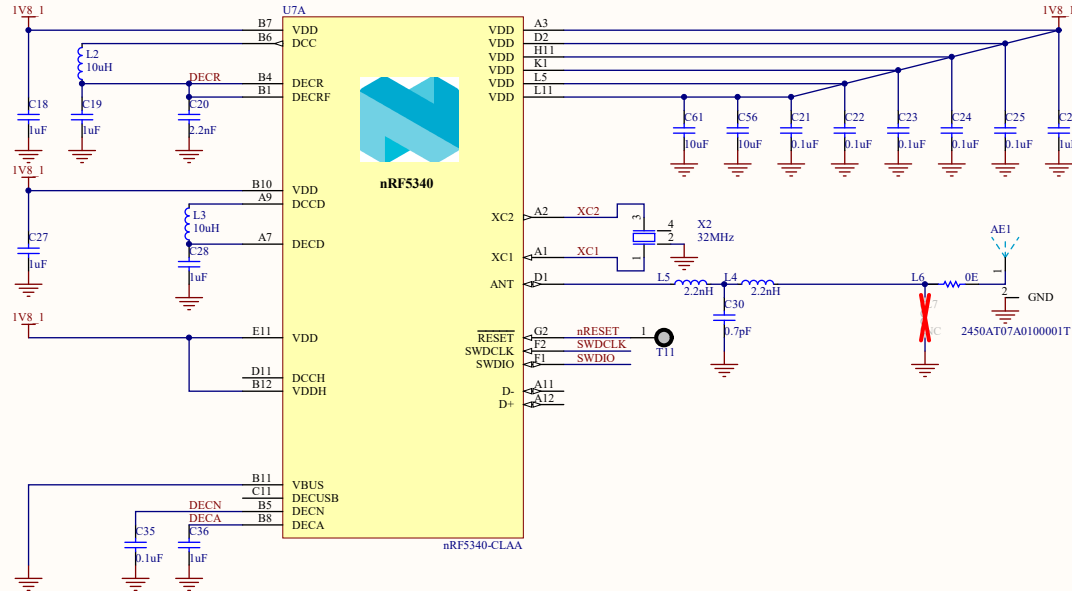



FLASH

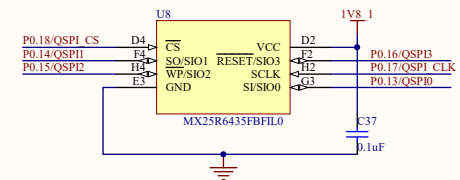


PROGRAMMING

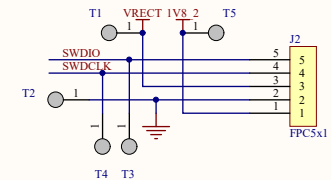


Config no.	Supply configuration		Enabled features				
	VDDH	VDD	EXTSUPPLY	DCDC on VREGH	DCDC on VREGMAIN and VREGRADIO	USB	NFC
Config. 3	N/A	Battery/Ext. regulator	No	No	Yes	No	No

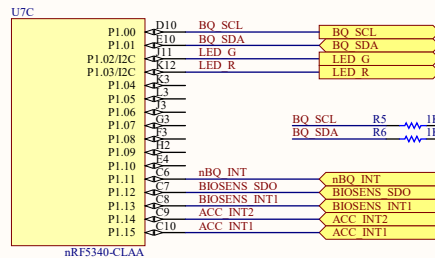

SIZE A3		ELEC Kirti Patil		SUB TITLE 05 MCU NRF5340.SchDoc		Revision 1	
DATE 17-12-2024	ASSY. NO. RING3	FAB. NO. RING3		SHEET 5 OF 6			



TEMPERATURE


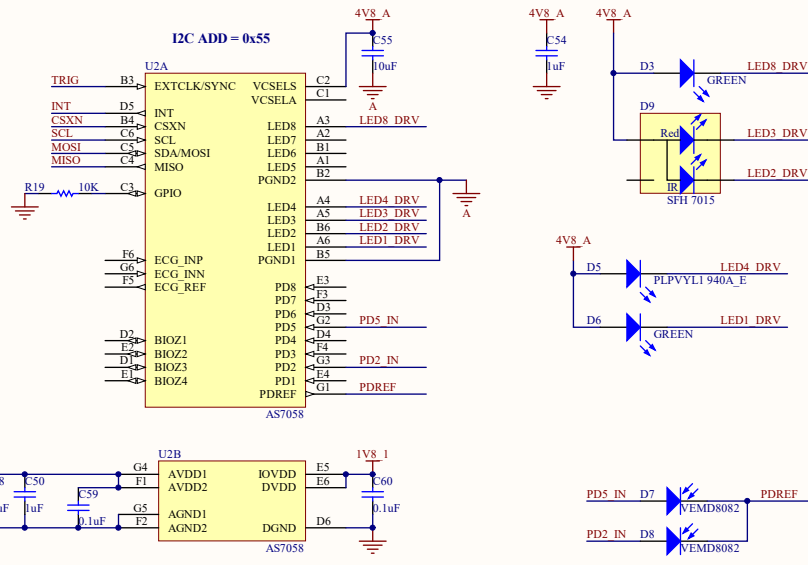


The diagram shows a 4-pin LED module with the following connections:

- Pin 1:** Connected to LED R (Red) through resistor R20 (110Ω).
- Pin 3:** Connected to LED B (Blue) through resistor R21 (110Ω).
- Pin 2:** Connected to LED G (Green) through resistor R22 (110Ω).
- Pin 4:** Connected to a 4V8 power source.

The module output is labeled **RED+GREEN+BLUE**.

ACCELEROMETER

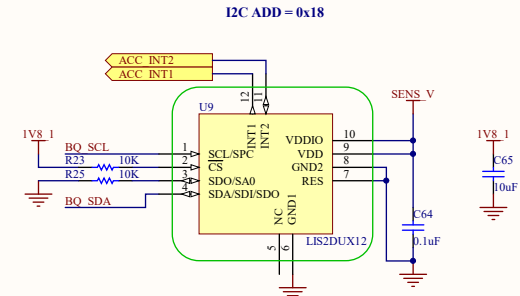

				Revision 1	
SIZE A3	ELEC Kirti Patial	SUB TITLE 06 PERIPHERALS.SchDoc			
DATE	17-12-2024	ASSY. NO.	RING3	FAB. NO.	RING3
				SHEET	6 OF 6